

FABRIJET **FH-3204**

3.2m Hybrid Textile Printer



01 Main features

FABRIJET

1. Most competitive in 3.2m segment

- Provides **best performance for its value**
- **Max 94m²/h (4pass)**

2. Different heads variations applicable

- **2 / 3 / 4 printheads** (2 channel) variations applicable
- 2 / 4 heads with 4colors, **3 heads with 6 colors**

3. Hybrid Textile printer

- 2 in 1 printer: **Direct to Textile and Dye sublimation on Paper** with 1 printer
- Mid-High class **Soft Signage** printer



01 Main features

FABRIJET

1. Most competitive in 3.2m segment

- Provides **best performance for its value**
- Capable of printing **up to 94 sqm/hr (4pass)**



2. Different heads variations applicable




- 2 / 3 / 4 heads variation with **up to 6 colors** (2 channel)
- Powered by **300dpi Kyocera printheads**




3. Hybrid Textile printer



- **Direct to textile** printing on polyester
- **Dye sublimation** on transfer paper
- **Flags, backlit, display(soft signage), stretch** fabrics applicable

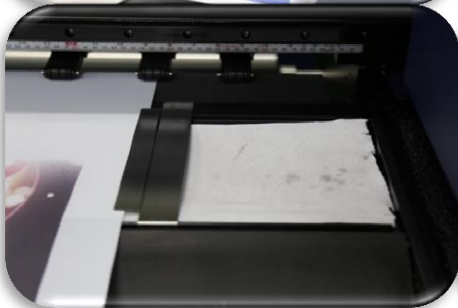

Pressure roll

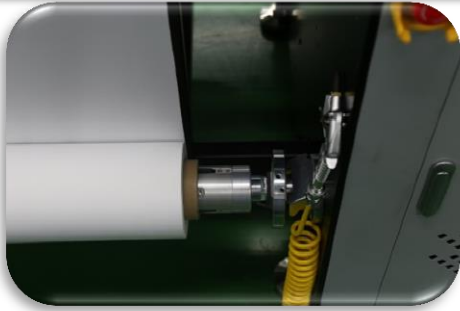

- Equipped with a pressure roll to enhance **stable media winding**
- Need an external air compressor for pressurizing pressure roll

Touch monitor operation



- **Integrated PC along with touch screen control system**
- Capable of operating printers with user interface

Switches with LED light



- Switches with **LED lighting**
- Showing **printer status** with a main power button
 - **Blue** : Ready for operation
 - **Red** : Error occurred
 - **White** : Printer initializing

Cleaning and Capping



- Cleaning and capping at the same station

Print head	Kyocera- 2 / 3 / 4 ea (2 Channel)							
Ink	DGI Original Water based Dye Sublimation Ink							
Resolution (dpi)	Max 600 dpi x 1,800 dpi							
Color	4 Colors (K, C, M, Y) / 6 Colors (Fy, Fp / Lm, Lc)							
Max. Media	240mm / 100kg (9.4inch / 220lb)							
Print Width	3,200mm / 126 inch							
Electricity	Single phase, 200-240V, 50/60 Hz, 25A (Printer: 5A, Dryer: 20A)							
Compressed Air	Air Pressure: 7kgf/cm ²		Capacity: 100L/min		Tubing	Inlet : 8mm		
						Outer: 6mm		
Print Speed	FH-3204 (4 heads)				FH-3204SE (2/3 heads)			
	Main scan	Sub scan	Print speed	Pass	Main scan	Sub scan	Print speed	Pass
	600	600	156	2	600	600	84	4
			94	4		900	59	6
		1200	50	8		1200	45	8
1800		34	12	-		-	-	

※ Dimensions & Weight

Length (mm)	Width (mm)	Height (mm)	Weight (Kg)
5,240	1,200mm	1,700mm	1,280Kg